

Technical Data – CD652AS


V2.0 10.07.18

Product description

- Premium quality transparent protection film
- Anti-scratch, Anti-static
- Prevents the attachment of dust and particles

Construction

- 3H hard-coated layer
- Primer
- PET film (125µm)
- Silicone PSA (Anti-static)
- PET liner

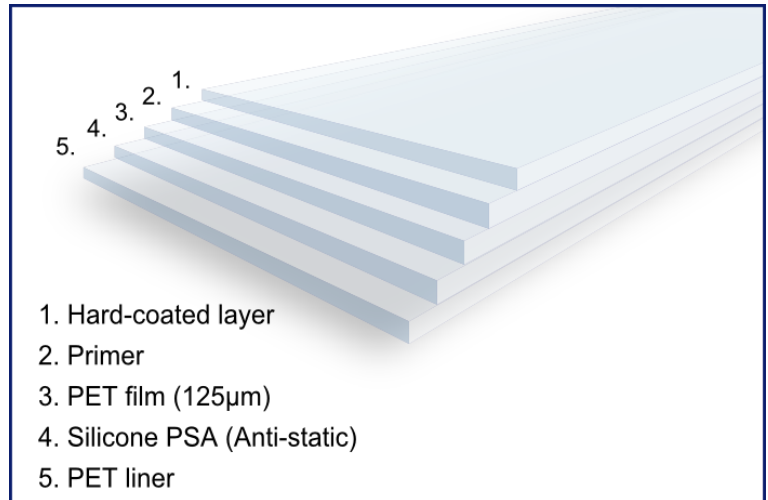

Technical data

Item	Unit		Spec.		Test method
Base thickness	µm	Inch	125	0.0049	ASTM D3652
Total thickness	µm	Inch	165	0.0065	ASTM D3652
Peel Strength	gf-25mm	ozf-in	1.5	0.0529	ASTM D3330
Tensile strength	kg/in ²	lb/in ²	50	110	ASTM D3759
Hardness	-		3H	-	-

Application

1. For use on glass, PMMA and Polycarbonate screens

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.