


Technical Data – CD700H

Product description

- Premium quality transparent protection film
- Clear anti-scratch hard-coat
- High grade silicone adhesive for clean removal

Construction

- PET protection film (50µm)
- Clear Hard Coating (15µm)
- PET film (100µm)
- Clear Silicone PSA (30µm)
- PE T Liner (75µm)

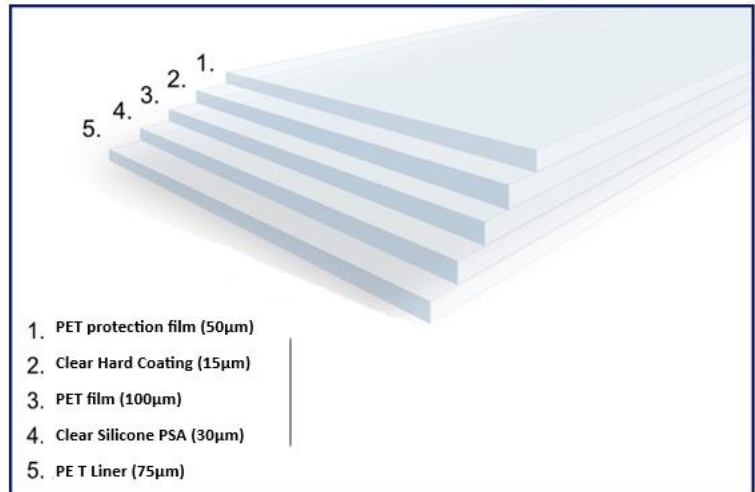

Technical data

Item	Spec.		Test method
Appearance	-	Transparent	Visual Test
Total thickness	µm	145 except release liner	-
Durability	g/25mm	Good	Company Method
Transmissivity	%	> 90	ASTM D1003
Haze	kg/cm	< 1	ASTM D1003
Hardness	H	≥ 7	Pencil Test
Adhesive	-	Silicone	-
Peel Strength	gf/inch	15 + / - 5 g/f	ASTM D6001

Application

1. Protection for the aftercare market for Smartphones and all touch screens and displays.
2. For use on glass, PMMA and Polycarbonate screens.
3. Goggles and visors.

Note: Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.